


KAFLEX multi

Multiple cable grommet

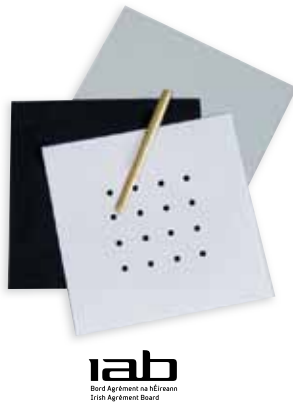

Technical Data:

Characteristics	Value
material	EPDM
temperature resistance	long term -40°C to +120°C
application temperature	from -10°C
colour	black

Applications:

Cable grommet made from strong and highly flexible EPDM for simple, rapid and permanent airtight feed-throughs for up to 16 cables through the airtight sealing layer or under the roof. Complete assembly set for easy installation. Stick with TESCON No.1 or TESCON VANA. For between 1 and 16 cables of 6 - 12 mm in diameter.

Delivery Form:

Mat. No.	EAN	Length	Width	PU	
10728	4026639016096	14 cm	14 cm	2	KAFLEX multi for up to 16 cables Ø 6-12 mm
10729	4026639016102	14 cm	14 cm	20	KAFLEX multi for up to 16 cables Ø 6-12 mm

Surfaces:

Before bonding, the substrate surface should be swept clean with a broom or wiped with a cloth. Bonding to frozen surfaces is not possible. The substrate material must be free of water-repellent substances (e.g. grease or silicone). The substrate must offer sufficient load-bearing capacity.

A permanent bond is achieved on all pro clima indoor and outdoor membranes (vapour check and airtightness membrane as well as trickle protection membrane and sarking membrane or wall lining membrane) and PE, PA, PP, aluminium foil used to create an airtight seal. Bonding and joints are possible on planed and painted wood, high density plastic and metal (e.g. pipes, windows etc.), hardboard (chipboard, OSB and veneer plywood, MDF board and softwood fibre sub-roof panels). Softwood fibre sub-roof panels require pre-treatment with TESCON PRIMER RP before bonding. The best results for the safety of the structure can be achieved on high-quality substrates.

The applicator is responsible for checking the suitability of the substrate. Adhesion tests are recommended.

Features/advantages:

For up to 16 cables. Made of high-quality EPDM, ideal for permanently airtight cable and pipe penetrations. Quick installation. The cables and pipes can be still be pulled or pushed without damaging the airtightness.

- ✓ Complete set for up to 16 cables
- ✓ Secure bond, quick and secure sealing, indoors or out
- ✓ Extremely flexible and elastic
- ✓ Need, efficient and quick installation
- ✓ Also suitable for penetrations under the roof

The information provided here is based on practical experience and the current state of knowledge. We reserve the right to make changes to the recommendations given or to make alterations due to technical developments and associated improvements in the quality of our products. We would be happy to inform you of the current technical state of the art at the time you use our products.

Further information about application and construction is given in the pro clima planning documentation and application recommendations. If you have any questions, please call the pro clima technical hotline Ireland and UK:
Phone: +353 46 9432104
Fax: +353 46 9432435
info@ecologicalbuildingsystems.com

For Stockists contact
Ireland
T. 046 9432104
F. 046 9432435
UK
T. 05600 758025
F. 05600 758026

Ecological Building Systems Ltd.

info@ecologicalbuildingsystems.com
www.ecologicalbuildingsystems.com

